

LED Highbay Light

110Lm/W



Industrial Areas

Manufacturing facilities

Warehouses

Factories

Parking Areas


Airports

Sport Centers

Exhibition Halls

REFLECTOR

Model: EX-T8HBA02
Diameter: D355

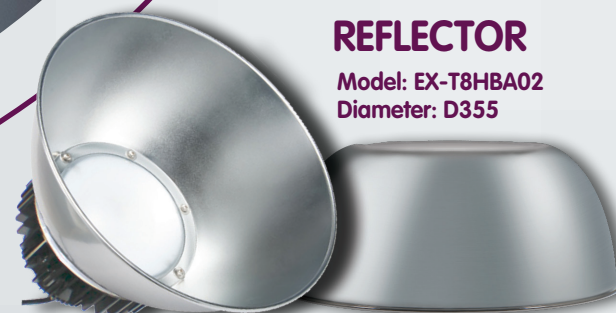

ALSO AVAILABLE IN 60°/70° DEGREES

IP65

- High efficiency: 110Lm/W
- Lumen maintenance rate: 70% @ 50.000hrs
- High Quality Philips Chips
- Integrated and isolated Meanwell HBG driver
- Special anti-corrosion Pure aluminum 1070 die cast housing
- Heat resistant and moisture tolerant design with IP65 rating.
- Compact Design
- Easy and firm installation
- Ideal for industrial use and installation in manufacturing facilities, warehouses, etc.

Model	Rated Power	Luminous Flux	Color	Beam Angle	Voltage	Frequency	IP	Material	Size
89300	100W	11000Lm	6500K	120°	AC90-305V	50/60Hz	65	AL+PC	D200x210mm
89304 / 89306	150W	16500Lm	6500K/4000K	120°	AC90-305V	50/60Hz	65	AL+PC	D260x208mm
89310 / 89312	200W	22000Lm	6500K/4000K	120°	AC90-305V	50/60Hz	65	AL+PC	D260x235mm

